

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20863 A1

- (51) International Patent Classification⁷: H04L 27/233, 27/38, 7/027 (74) Agent: NIYOGI, Bidyut, K.; Transnational Enterprises, 95 Bulldog Boulevard, Suite 207, Melbourne, FL 32901 (US).
- (21) International Application Number: PCT/US00/25257
- (22) International Filing Date:
14 September 2000 (14.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/395,699 14 September 1999 (14.09.1999) US
- (81) Designated States (*national*): AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW.
- (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (71) Applicant: HARRIS CORPORATION [US/US]; 1025 West Nasa Boulevard, Melbourne, FL 32919 (US). Published:
— With international search report.
- (72) Inventors: SCOTT, Kenneth; 204 Hendon Dr. N.W., Calgary, Alberta T2K 1Z2 (CA). OLASZ, Elizabeth; 61-9908 Bonaventure Dr. S.E., Calgary, Alberta T2J 5E3 (CA). For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR CARRIER PHASE TRACKING

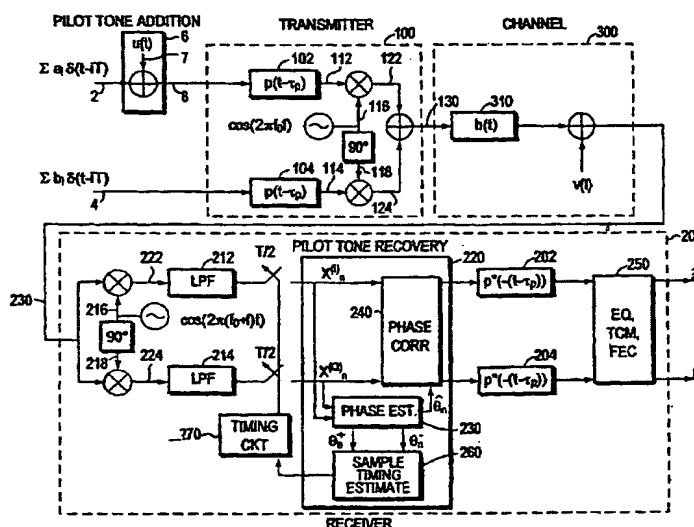

(57) Abstract: A method and telecommunication system for tracking the carrier phase of a received signal (2, 4) includes the addition of a pilot signal (7) to the data component of the signal prior to modulation and transmission (100). The pilot signal (230) is to have a frequency equal to the inverse of twice a data symbol interval with zero crossings positioned at the midpoint of each symbol interval to avoid interference with the data. The received signal (230) is demodulated to produce a complex data signal from which the pilot signal is detected to provide an estimate of the phase error in the complex data signal (230). The elimination of the phase error from the complex data signal is accomplished through a corrective phase shift (240) that is equal and opposite to the estimated phase error.

BEST AVAILABLE COPY

WO 01/20863 A1

METHOD AND APPARATUS FOR CARRIER PHASE TRACKING

This invention relates to telecommunications systems, and in particular to digital communications systems employing higher order linear modulation.

Digital communications systems for the transmission of information, or data, are
5 commonplace. An information-bearing signal generally consists of a stream of data symbols, each one being selected from a set of possible discrete values or levels, e.g., +1 or -1, and can be viewed as a "baseband" signal because it has a frequency spectrum ranging from DC to approximately the maximum data rate in symbols per second. To more efficiently transmit the information through a medium, or channel, a transmitter may "modulate" the data onto
10 a "carrier" sinusoid. A local reference generator at the transmitter produces the carrier sinusoid of frequency f_c , which is usually selected to be much higher than the maximum baseband frequency. Data modulation is simply the modulation of the carrier's frequency phase and/or magnitude, according to the data bit values. As a result of this modulation, the information-bearing signal is shifted from baseband up to the carrier frequency f_c , which
15 is chosen to avoid interference with other transmitted signals.

One of the first functions of a receiver, therefore, is to shift, or demodulate, the information-bearing component of a received signal back down to baseband by multiplying it with a local reference of frequency f_c . This frequency-shifting function, referred to as "carrier recovery" or "phase tracking", must be very accurate; otherwise, the receiver may make errors during
20 detection when it determines the data bit values represented by received symbols. Unfortunately, an accurate down-conversion is difficult due to phase variations introduced into the received signal by two separate processes. First, in wireless channels, the transmitted signal may be Doppler shifted as it passes through the channel due to relative motion between the transmitter and receiver. Second, the local reference at the transmitter
25 may be out of phase with the local reference at the receiver. In fact, the phase error may even be time varying.

The present invention includes a telecommunications system comprising a transmitter and a receiver, said transmitter for transmitting a modulated carrier into a channel, said transmitter including an adder for adding a pilot signal to a data signal, said data signal
30 comprised of data symbols having a symbol interval with a midpoint, said pilot signal having a frequency equal to the inverse of two times the symbol interval, a first zero crossing point located at a first symbol interval midpoint, and a second zero crossing located at a next

symbol interval midpoint, characterized in that a modulator for modulating the data signal and pilot signal on to a carrier sinusoid to produce the modulated carrier, said receiver for receiving from the channel the modulated carrier transmitted by the transmitter; said receiver having a demodulator for demodulating the received modulated carrier to produce
5 a demodulated signal, a phase estimator for recovering the pilot tone from the signal received by the receiver to produce a phase error estimate, of the pilot tone, and a phase adjuster for adjusting the phase demodulated signal based on the phase error estimate.

Conveniently, carrier recovery is commonly performed at the carrier frequency, a carrier phase estimate derived from the demodulated signal is used to dynamically adjust the phase
10 of the receiver's local reference. However, when the carrier is complex-modulated, i.e., the data bit value is encoded into the phase of the transmitted data symbol, carrier recovery at radio frequencies is particularly difficult. Most conventional systems employ either a non-linear operation, such as a Costas loop or a squaring loop, or a decision-directed operation to track the carrier. In the first case, the received signal is passed through a non-linear function
15 to generate power at the carrier frequency onto which a phase-locked loop (PLL) can lock and then track the carrier. The complexity of a non-linear operation increases with the order of modulation, however, and is thus impractical for use with higher-order modulation schemes. Differential encoding at the transmitter, along with differential decoding at the receiver, is also required because of a fixed phase ambiguity between the estimate produced
20 by the non-linear operation and the received signal. For high-order modulation schemes, decision-directed operation can be more easily implemented than the techniques based on non-linear operations, but it works poorly when a received signal has a low signal-to-noise ratio (SNR), i.e., a bit error rate greater than 10^{-2} . A high bit error rate can also be caused by signal distortions, for example, time dispersion. Since the decision-directed techniques rely
25 on correct decisions, significant levels of these distortions are not tolerable.

The invention also includes a method for carrier phase tracking in a telecommunications system comprising transmitter and a receiver, said transmitter characterized by the steps of:

adding a pilot signal to a data signal, said data signal comprised of data symbols having a
30 symbol interval with a midpoint, said pilot signal having a frequency equal to the inverse of two times the symbol interval, a first zero crossing point located at a first symbol interval midpoint, and a second zero crossing located at a next symbol interval midpoint, modulating the data signal and pilot signal on to a carrier sinusoid, and transmitting the modulated

carrier into a channel, said receiver performing the steps of receiving from the channel the modulated carrier transmitted by the transmitter, demodulating the received modulated carrier to produce a demodulated signal, recovering the pilot signal from the demodulated signal to produce a phase error estimate, and adjusting the phase of the demodulated signal
5 based on the phase error estimate.

Suitably, is a method for tracking the carrier phase of a received signal in a telecommunication system employing higher-order complex modulation. Such a method should not require modification of the information-bearing signal and should be capable of performing in less than optimal channel conditions.

10 The invention, furthermore includes a receiver for receiving from a channel a signal comprising a carrier modulated with periodic data symbols and with a pilot signal having a frequency equal to the symbol the inverse of two times the symbol interval, said pilot signal having zero crossings coinciding with the midpoints of the symbol intervals, said receiver characterized in that a demodulator for demodulating the received modulated carrier to
15 produce a demodulated data signal, a phase estimator for recovering the pilot signal from the demodulated signal to produce a phase error estimate, and a phase adjuster for adjusting the phase of the demodulated signal based on the phase error estimate.

Advantageously, a system and a method for tracking the carrier phase of a received signal includes the addition of a pilot signal (also referred to herein as a pilot tone) to the
20 information-bearing component of the signal prior to modulation and transmission. The received signal is demodulated to produce a complex data signal from which the pilot tone is detected to provide an estimate of the phase error in the complex data signal. The elimination of the phase error from the complex data signal is accomplished through a corrective phase shift that is equal and opposite to the estimated phase error. A sample
25 timing estimate may be obtained from the pilot tone in a similar manner. The phase and frequency of the pilot tone are selected such that the pilot tone does not interfere with the information-bearing component of the transmitted signal. Therefore, other than the simple addition of the pilot tone, no modification of the information-bearing component is required. Furthermore, the method can be readily implemented in higher-order modulation schemes
30 and, because pilot tone detection is insensitive to the exact magnitude of the pilot tone, the method is also robust.

The invention will now be described, by way of example, with reference to the accompanying drawings in which :

Fig. 1 is a diagram of a telecommunications system incorporating the invention;

Fig. 2 is the time domain representation of a baseband signal and a pilot tone;

Fig. 3 is the frequency domain representation of a transmitted signal that includes a pilot tone;

5 Fig. 4 is the frequency domain representation of a received pilot tone;

Fig. 5 is a diagram of a circuit for estimating the phase error in the received signal;

Fig. 6 is a diagram of a circuit for elimination of the estimated phase error from the baseband signal; and

Fig. 7 is a diagram of a circuit for producing a sample timing estimate from the pilot
10 tone.

A telecommunications system is illustrated in FIG. 1. Although any of a variety of higher order linear modulation techniques, such as quadrature amplitude modulation (QAM) or trellis coded modulation (TCM), may be used, the system depicted in FIG. 1 employs QAM. The system includes a transmitter 100 and a receiver 200 communicating
15 through a channel 300. An in-phase data signal 2 comprises the inphase part, a_i , of the i^{th} transmitted data symbol and a quadrature data signal 4 comprises the quadrature part, b_i , of the i^{th} transmitted data symbol. For simplicity, each data signal can be represented mathematically as a train of Kronecker delta functions (8) 3, 5 (i.e., a delta function of unit amplitude) spaced at T seconds, each multiplied by one of a set of amplitude values (e.g., -1,
20 -0.5, +0.5, +1), as shown in FIG. 2.

The inventive telecommunication system includes a circuit 6 that adds a pilot tone 7 to either one of the data signals, typically the inphase data signal 2. The pilot tone 7 is phase-locked to the data clock (not shown) and is selected to have a period of $2T$ and a phase such that the zero crossings occur at nT seconds, i.e., the pilot tone 7 has zero magnitude at the
25 center of each symbol interval (Fig.2), and may be represented mathematically as $u(t) = U_0 \sin(2\pi(1/2T)t)$. This frequency and phase specification ensures that the pilot tone minimally interferes with the inphase and quadrature data signals. At the same time, the pilot tone is within the bandwidth of the information signal, so that the bandwidth of the transmitted signal is not increased. Because the pilot tone does not contain information
30 (other than a frequency and phase related to the carrier), its power may be much lower than the power of the information-bearing component. It has been determined experimentally that the power of the pilot tone can be 5 to 10 dB lower than that of the information signal.

The inphase-data-plus-pilot-tone signal 8 and quadrature data signal 4 are passed through pulse shaping filters 102, 104, respectively. The resulting filter outputs 112, 114 are modulated onto inphase and quadrature carriers 116, 118, respectively, of frequency f_c generated by a transmitter local oscillator 106. The pulse shaping filters have a delay of t_p seconds to make the pulse casual. The modulated carriers 122, 124 are added together to produce a transmit signal 130, and the spectrum of the transmit signal 130 is shown in FIG. 3. The transmit signal 130 passes through a channel 300 having a frequency response modeled by an impulse response filter ($h(t)$) 310 and wherein it is corrupted by additive channel noise, $v(t)$.

With reference again to FIG. 1, the receiver 200 initially demodulates, or down-converts, the received signal 230 by multiplying it against inphase and quadrature carrier reference signals 216, 218 generated by a receiver local oscillator 206. As noted above, movement of the receiver relative to the transmitter produces a Doppler shift in the received signal and this shift contributes to the time varying phase error, $f_e(t)$. The other contributor to the phase error is the difference in the frequencies of the transmitter local oscillator 106 and the receiver local oscillator 206. The receiver 200 extracts the pilot tone from the received signal to produce a phase error estimate that is then used in a final adjustment to eliminate any residual carrier frequency error. This use of a pilot tone is possible because of the linear relationship that exists between the phase error detected in the pilot tone and the phase error present in the carrier.

The inphase and quadrature downconverted signals 222, 224 are passed through a pair of low-pass filters 212, 214, respectively, each having a bandwidth approximately equal to $1/2T$ Hz. The filter outputs are sampled at a rate that is greater than the two-sided bandwidth of the data signal, e.g. at a rate of $2/T$ samples/second, to produce a set of inphase data samples, $X^{(I)}_n$, and a set of quadrature data samples, $X^{(Q)}_n$. This conversion of the downconverted signals into data samples facilitates the use of a software implementation of the pilot tone recovery 220.

Although at the transmitter the pilot tone is a single real sinusoid of frequency $1/2T$, due to the frequency shifts it must be considered as two complex sinusoids at the receiver. The frequency domain representation of the received complex pilot tone is illustrated in FIG. 4. The original pilot tone at the transmitter is:

$$\begin{aligned}
 u(t) &= U_0 \sin\left(2\pi\left(\frac{1}{2T}\right)t\right) \\
 &= U_0 \frac{e^{j2\pi\left(\frac{1}{2T}\right)t} - e^{-j2\pi\left(\frac{1}{2T}\right)t}}{2j},
 \end{aligned}$$

where U_0 is the pilot tone's amplitude. Thus, the "real" pilot tone may actually be considered as two complex tones, corresponding to the two terms in the equation above. The phase shift in the complex tone caused by the channel are:

$$\begin{aligned}
 \phi_c^+ &\equiv \angle H\left(\frac{1}{2T}\right), \text{ and} \\
 \phi_c^- &\equiv \angle H\left(-\frac{1}{2T}\right).
 \end{aligned} \tag{A}$$

The received pilot tone (assuming the use of linear phase pulse shaping filters 102 and 104) is

$$\begin{aligned}
 w(t) &= [u(t) * p(t - \tau_p) * h(t)] \cdot A e^{j\phi_c(t)} \\
 &= \left[U_0 \sin\left(2\pi\left(\frac{1}{2T}\right)t\right) * p(t - \tau_p) * h(t) \right] \cdot A e^{j\phi_c(t)} \\
 &= \left[U_0 \left(\frac{e^{j2\pi\frac{1}{2T}t} - e^{-j2\pi\frac{1}{2T}t}}{2j} \right) * p(t - \tau_p) * h(t) \right] \cdot A e^{j\phi_c(t)} \\
 &= U_0 \left| P\left(\frac{1}{2T}\right) \right| \left(\frac{\left| H\left(\frac{1}{2T}\right) \right| e^{j\left(2\pi\frac{1}{2T}(t - \tau_p) + \phi_c^+\right)}}{2j} - \frac{\left| H\left(-\frac{1}{2T}\right) \right| e^{-j\left(2\pi\frac{1}{2T}(t - \tau_p) + \phi_c^-\right)}}{2j} \right) A e^{j\phi_c(t)}
 \end{aligned}$$

The functions $p(t)$ and $P(f)$ are the pulse shaping filter's impulse response and frequency response, respectively; the functions $h(t)$ and $H(f)$ are the channel's impulse response and frequency response, respectively; and the function $\phi_e(t)$ is the phase error caused by Doppler shift and/or local oscillator inaccuracy. The phases of the two complex sinusoids
 5 are

$$\begin{aligned}\theta^+(t) &= 2\pi \left(\frac{1}{2T} \right) (t - \tau_p) - \frac{\pi}{2} + \phi_c^+ + \phi_e(t) \quad \text{and} \\ \theta^-(t) &= -2\pi \left(\frac{1}{2T} \right) (t - \tau_p) + \frac{\pi}{2} + \phi_c^- + \phi_e(t).\end{aligned}\tag{B}$$

The two phases are added and the result divided to produce a phase error estimate

$$\hat{\theta}(t) = \frac{\theta^+(t) + \theta^-(t)}{2} = \phi_e(t) + \frac{\phi_c^+ + \phi_c^-}{2} = \phi_e(t) + \phi_c^-.$$

Therefore, the phase error estimate is equal to the phase error to be tracked, $\phi_e(t)$, plus a
 10 constant phase error, ϕ_c^- , caused by the shift of the channel. In the case of an ideal channel, the constant phase error forms a part of the phase which is to be tracked. In the case of a non-ideal channel, the constant phase error will be an average of two components, ϕ_c^+ and ϕ_c^- . The use of an equalizer for the non-ideal case is common practice in the art, and the constant phase error is corrected by such a device.

15 The frequency domain representation of the received complex pilot tone is illustrated in FIG. 4. The phase estimation circuit 230 of FIG. 5 is comprised of a pair of phase-locked loops (PLLs) 232, 234. The first PLL, PLL (+) 232, is configured to lock on to the complex tone centered near $1/2T$ Hz, and the second PLL, PLL (-) 234, is configured to lock on to the complex tone centered near $-1/2T$ Hz. The output of PLL (+) 232 is the sum of the pilot
 20 tone's phase and the phase error introduced by the channel and/or the inaccurate reference, and the output of PLL (-) 234 is the sum of the negative of the pilot tone's phase and the same phase error. These two outputs, $q_n^{(+)}$ and $q_n^{(-)}$, are added, and the resulting sum is divided by two in half to produce an estimate of the phase error, q_n , which is caused by

Doppler shift and by the phase difference between the transmitter and receiver local references.

The elimination of the phase error in the demodulated data is accomplished by the phase error correction circuit 240 of FIG. 6. A phase error phasor of unit magnitude and phase equal and opposite to the estimated phase error, q_n , is initially generated. The phasor may be represented mathematically as e^{jq_n} . The phase error present in the demodulated data is removed by multiplying the phasor against the complex data signal, i.e., $X_n^{(I)} + jX_n^{(Q)}$. The result is then passed to the remainder of the receiver, which is usually comprised of the matched filter pair 202, 204 (matched to the pulse shaping filters 102, 104 of the transmitter 100) and the conventional equalization and error-correcting circuitry 250, to produce an estimate of the inphase part, a_i , of the i^{th} data symbol, and an estimate of the quadrature part, b_i , of the i^{th} data symbol.

The pilot tone may also be used to produce a sample timing estimate. The sample timing estimate is extracted from the phases, $q_n^{(+)}$ and $q_n^{(-)}$, produced by PLL (+) 232 and PLL (-) 234, respectively, by the sample timing estimator of FIG. 7 in a manner similar to that by which the phase estimate is produced by the phase estimator. For the purposes of timing recovery, it will be assumed that the frequency response of the channel is flat, i.e.,

$$h(t) = H_0 \delta(t - \tau_c).$$

Then, from equation (A),

$$\phi_c^{+} = -2 \pi \left(\frac{1}{2T} \right) \tau_c, \quad (C)$$

$$\phi_c^{-} = -2 \pi \left(-\frac{1}{2T} \right) \tau_c. \quad (D)$$

The signal $s(t)$, which will be used for the timing estimation, is constructed from the phases of the two tones as

$$s(t) = e^{j(\theta^{+}(t) - \theta^{-}(t) + \pi)} \quad (E)$$

Substituting equations (C) and (D) into equation (B) and the result into equation (E) produces

$$s(t) = e^{j2\pi\left(\frac{1}{T}\right)(t - \tau_p - \tau_c)} \quad (F)$$

The phase of the signal is zero at the points

$$t_i = \tau_p + \tau_c + iT \quad \text{for } i \in -\infty \text{ to } +\infty.$$

In order to obtain maximum eye openings, the received signal should be sampled when the phase of the signal of equation (E) is equal to zero. Accordingly, the sample timing estimator 260 of FIG. 7 produces a phasor estimate of unit magnitude and a phase equal to the phase, $q^{(+)}_n$, produced by PLL (+) 232, minus the phase, $q^{(-)}_n$, produced by PLL (-) 234, and further
 10 advanced by 180 degrees. The estimate is then passed to a sample clock circuit 270 which uses the estimate to adjust the phase of the sampling clock.

A method and telecommunication system for tracking the carrier phase of a received signal includes the addition of a pilot signal to the data component of the signal prior to modulation and transmission. The pilot signal is to have a frequency equal to the inverse of
 15 twice a data symbol interval with zero crossings positioned at the midpoint of each symbol interval to avoid interference with the data. The received signal is demodulated to produce a complex data signal from which the pilot signal is detected to provide an estimate of the phase error in the complex data signal. The elimination of the phase error from the complex data signal is accomplished through a corrective phase shift that is equal and opposite to the
 20 estimated phase error.

CLAIMS:

1. A telecommunications system comprising a transmitter and a receiver, said transmitter for transmitting a modulated carrier into a channel, said transmitter including an adder for adding a pilot signal to a data signal, said data signal comprised of data symbols
5 having a symbol interval with a midpoint, said pilot signal having a frequency equal to the inverse of two times the symbol interval, a first zero crossing point located at a first symbol interval midpoint, and a second zero crossing located at a next symbol interval midpoint, characterized in that a modulator for modulating the data signal and pilot signal on to a carrier sinusoid to produce the modulated carrier, said receiver for receiving from the
10 channel the modulated carrier transmitted by the transmitter; said receiver having a demodulator for demodulating the received modulated carrier to produce a demodulated signal, a phase estimator for recovering the pilot tone from the signal received by the receiver to produce a phase error estimate, of the pilot tone, and a phase adjuster for adjusting the phase demodulated signal based on the phase error estimate.
- 15 2. A system as claimed in claim 1 characterized in that the receiver includes a sample timing estimator for generating a sample timing estimate having periodic points of zero phase relative to the pilot tone contained in the received signal, said demodulator including means in synchronism with said points of zero phase to produce the demodulated signal, and the phase estimator is comprised of a pair of filters for tracking separate components of
20 the pilot tone to produce the phase error estimate.
3. A system as claimed in claim 1 characterized in that the modulation is quadrature modulation, and in which the modulation is trellis-coded modulation.
4. A method for carrier phase tracking in a telecommunications system comprising transmitter and a receiver, said transmitter characterized by the steps of:
25 adding a pilot signal to a data signal, said data signal comprised of data symbols having a symbol interval with a midpoint, said pilot signal having a frequency equal to the inverse of two times the symbol interval, a first zero crossing point located at a first symbol interval midpoint, and a second zero crossing located at a next symbol interval midpoint, modulating the data signal and pilot signal on to a carrier sinusoid, and transmitting the modulated
30 carrier into a channel, said receiver performing the steps of receiving from the channel the modulated carrier transmitted by the transmitter, demodulating the received modulated carrier to produce a demodulated signal, recovering the pilot signal from the demodulated

signal to produce a phase error estimate, and adjusting the phase of the demodulated signal based on the phase error estimate.

- 5 5. The method as claimed in claim 4 characterized by the receiver performing the additional steps of: generating a sample timing estimate having periodic points of zero phase, and aligning sampling points of a sampling clock with the zero phase points of the estimate, said sampling clock being used in the demodulating step for sampling the received modulated carrier to produce the complex demodulated signal.
6. A method as claimed in claim 4 characterized by the step of recovering the pilot signal further comprises tracking separate components of the pilot signal to produce the
10 phase error estimate.
7. A method as claimed in claim 4 characterized by the modulation being quadrature modulation, and in which the modulation is trellis coded modulation.
8. A transmitter for transmitting a modulated carrier into a channel for reception by a receiver, said transmitter characterized in that an adder for adding a pilot signal to a data
15 signal, said data signal comprised of data symbols having a symbol interval with a midpoint, said pilot signal having a frequency equal to the inverse of two times the symbol interval, a first zero crossing point located at a first symbol interval midpoint, and a second zero crossing located at a next symbol interval midpoint, and a modulator for modulating the data signal and pilot tone on to a carrier sinusoid to produce the modulated carrier.
- 20 9. A transmitter as claimed in claim 8 characterized in that the modulation is quadrature modulation, in which the modulation is trellis coded modulation.
10. A receiver for receiving from a channel a signal comprising a carrier modulated with periodic data symbols and with a pilot signal having a frequency equal to the symbol the inverse of two times the symbol interval, said pilot signal having zero crossings coinciding
25 with the midpoints of the symbol intervals, said receiver characterized in that a demodulator for demodulating the received modulated carrier to produce a demodulated data signal, a phase estimator for recovering the pilot signal from the demodulated signal to produce a phase error estimate, and a phase adjuster for adjusting the phase of the demodulated signal based on the phase error estimate.
- 30 11. The receiver as claimed in claim 10 characterized in that a sample timing estimator for generating a sample timing estimate having periodic points of zero phase, said sample timing estimate for aligning sampling points of a sampling clock with the zero phase points of the sample timing estimate; said demodulator sampling the received signal with the

sampling clock to produce the demodulated signal, and in which the phase estimator is comprised of a pair of filters for tracking separate components of the pilot tone to produce the phase error estimate.

12. A receiver as claimed in claim 11 characterized in that the modulation of the data
5 symbols is quadrature modulation, and in which the modulation of the data symbols is trellis coded modulation.

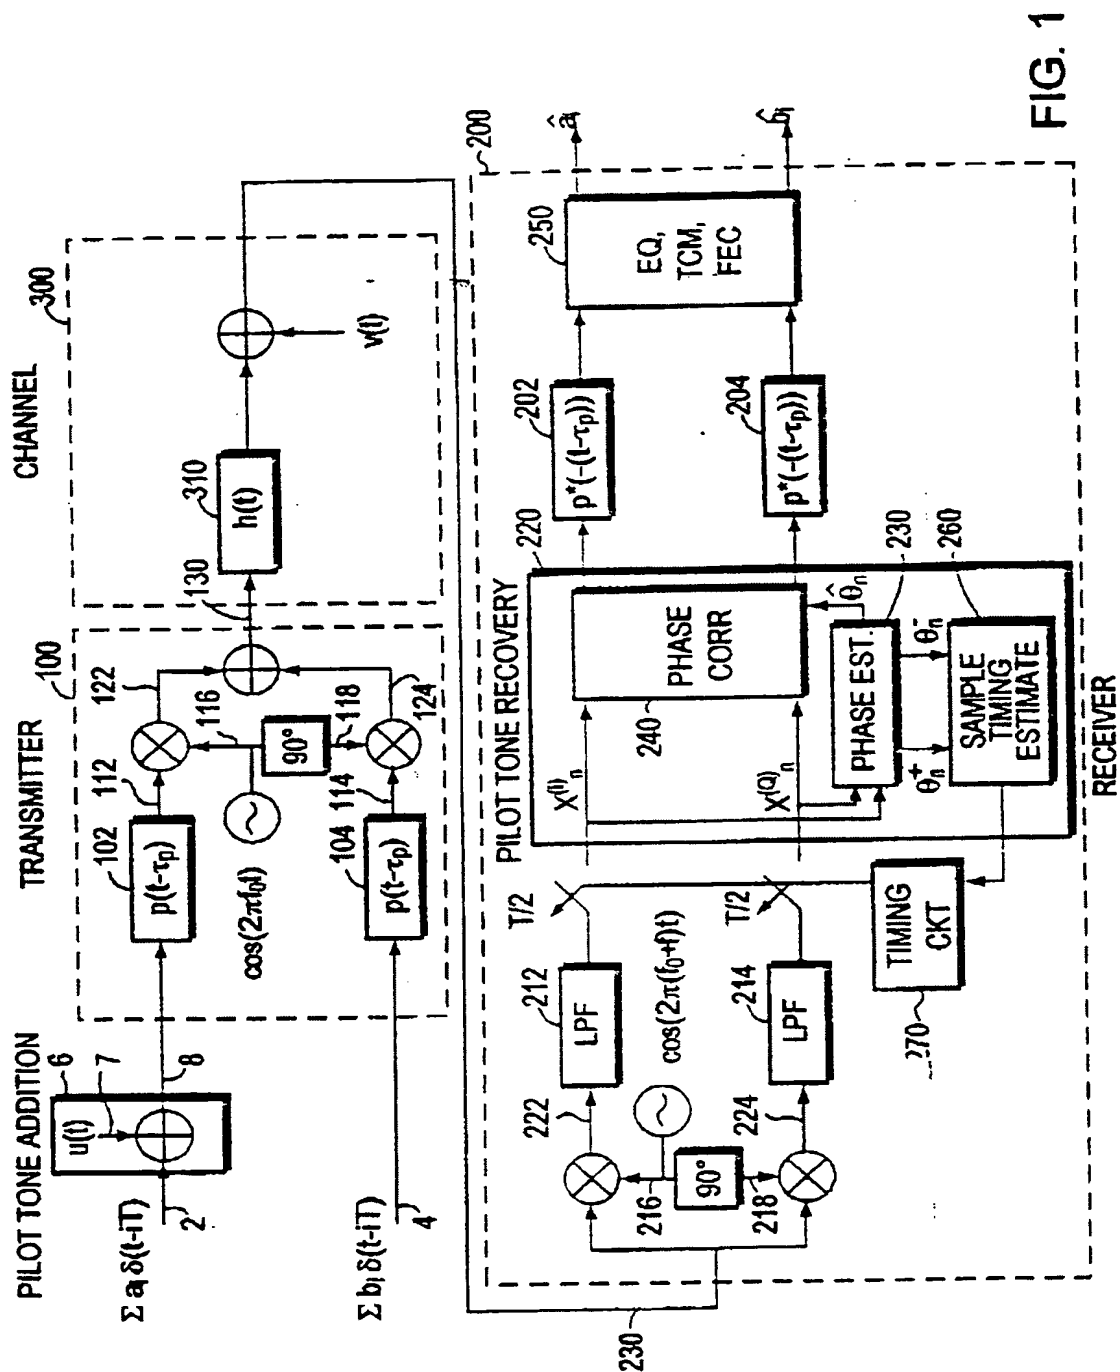


FIG. 1

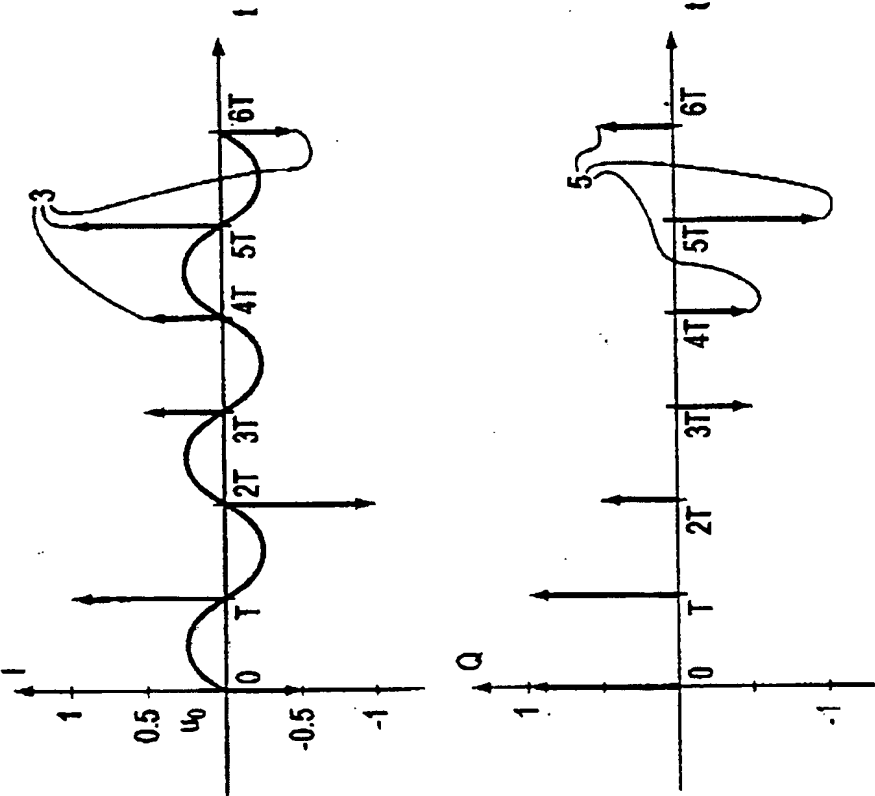


FIG. 2

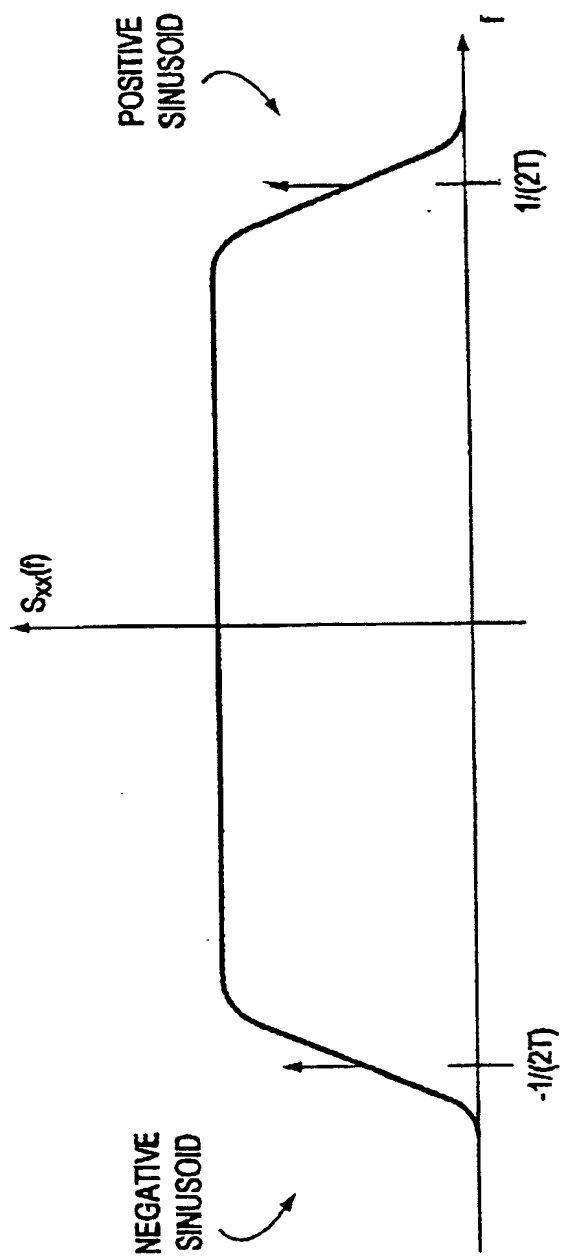


FIG. 3

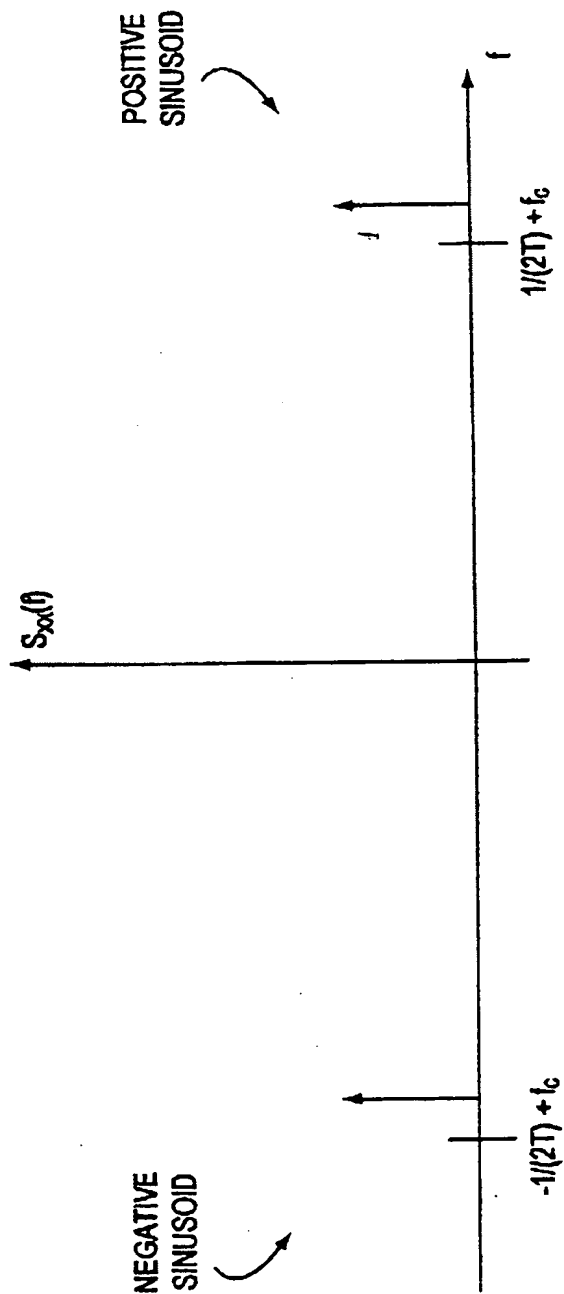


FIG. 4

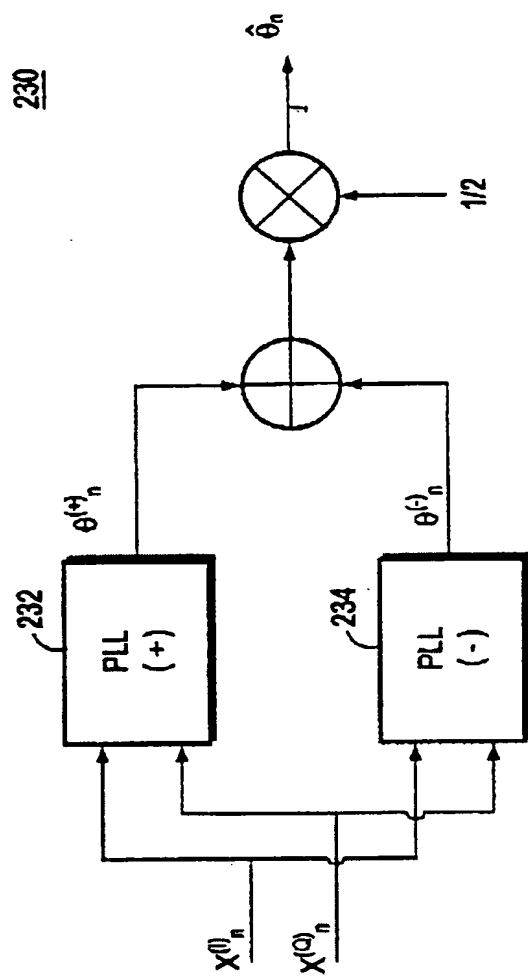


FIG. 5

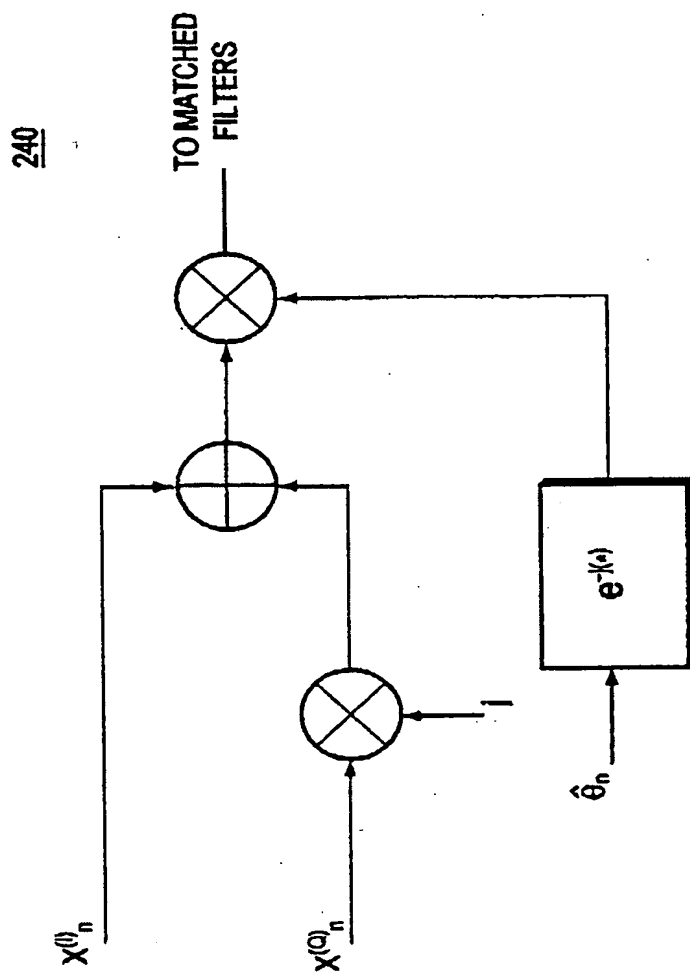


FIG. 6

777

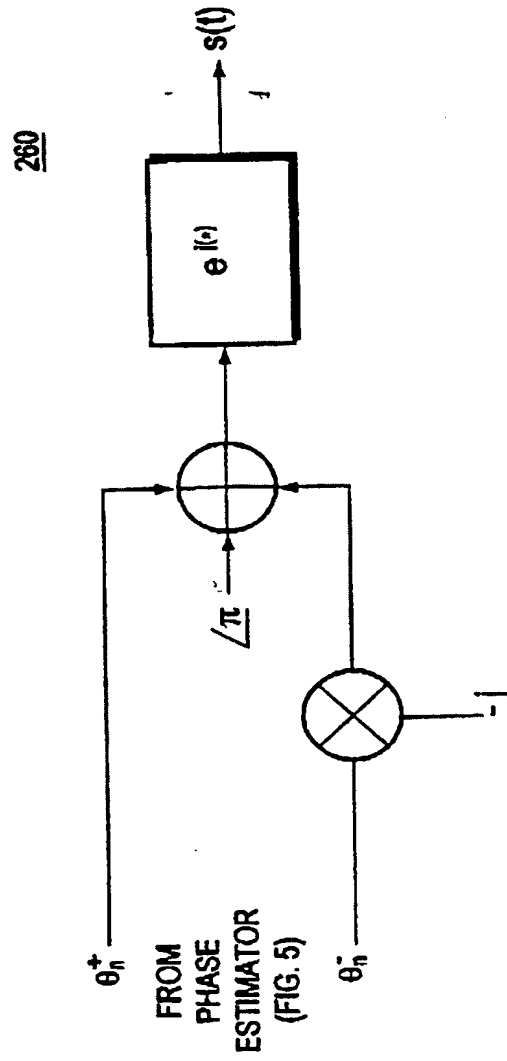


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/25257

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L27/233 H04L27/38 H04L7/027

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MATHIOPOULOS P ET AL: "IN-BAND PILOT INSERTION AT THE NYQUIST FREQUENCY FOR TRANSPARENT SIGNALLING" PROCEEDINGS OF THE GLOBAL TELECOMMUNICATIONS CONFERENCE AND EXHIBITION(GLOBECOM),US,NEW YORK, IEEE, November 1987 (1987-11), pages 2063-2068, XP000795151 abstract	1,3,4, 7-10
A	page 2063, column 2, line 46 -page 2064, column 2, line 31; figures 1,2 --- -/--	2,5,6, 11,12



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

15 December 2000

Date of mailing of the international search report

21/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marselli, M

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/25257

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 3 959 726 A (HINOSHITA SHIGEHICO ET AL) 25 May 1976 (1976-05-25) column 4, line 10 - line 54; figure 4 column 5, line 44 -column 7, line 5; figures 7,8 ---	1,3,4, 7-10 2,5,6, 11,12
A	GB 2 092 845 A (REDIFON TELECOMM) 18 August 1982 (1982-08-18) page 2, line 75 - line 85; figure 3 page 2, line 96 -page 3, line 8; figure 5 page 3, line 28 - line 84; figure 6 -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/US 00/25257

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3959726 A	25-05-1976	JP 48038608 A	07-06-1973
		JP 992589 C	15-04-1980
		JP 48056050 A	07-08-1973
		JP 54026842 B	06-09-1979
		DE 2245189 A	22-03-1973
		GB 1408937 A	08-10-1975
<hr/>			
GB 2092845 A	18-08-1982	NONE	
<hr/>			

This Page Blank (uspio,

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspro)